

# Vertex S+

## N-type i-TOPCon Monofacial Dual Glass MONOCRYSTALLINE MODULE

PRODUCT: TSM-XXXNEG9R.25

PRODUCT RANGE: 425-450W

# 450W

MAXIMUM POWER OUTPUT

# 0~+5W

BINNING TOLERANCE

# 22.5%

MAXIMUM EFFICIENCY

25 Years **PRODUCT WARRANTY**

30 Years **POWER WARRANTY**



### Outstanding Visual Appearance

- Designed with aesthetics in mind
- Inheriting Trina Solar awards-winning full black design
- Thinner wires that appear full black at a distance



### Small in size, bigger on power

- Up to 450W, 22.5% module efficiency with high density interconnect technology
- Reduce installation cost with higher power bin and efficiency
- Boost performance in warm weather with low temperature coefficient and operating temperature



### Light Dual-glass Design

- Less prone to micro-cracks and scratches on the back side
- Fire class rating C



### Ultra-low Degradation, longer warranty, higher output


- First-year degradation 1% and annual degradation at 0.4%
- Up to 25 years product warranty and 30 years power warranty



### Universal solution for residential and C&I rooftops

- Easy for integration, designed for compatibility with existing mainstream inverters and diverse mounting systems
- Perfect size and low weight for handling and installation
- Most valuable solution on low load capacity rooftops (weight similar to backsheet version)
- Mechanical performance up to 5400 Pa positive load and 4000 Pa negative load

### Trina Solar's Vertex Monofacial Dual Glass Performance Warranty

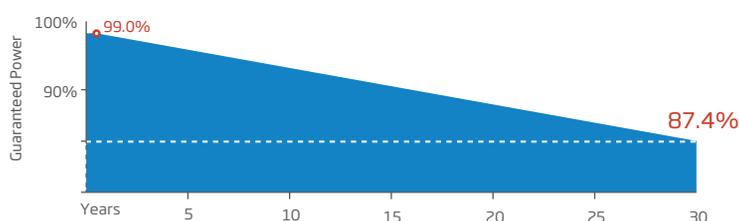




### Comprehensive Products and System Certificates



IEC61215/IEC61730  
 ISO 9001: Quality Management System  
 ISO 14001: Environmental Management System  
 ISO14064: Greenhouse Gases Emissions Verification  
 ISO45001: Occupational Health and Safety Management System



**DIMENSIONS OF PV MODULE(mm)**

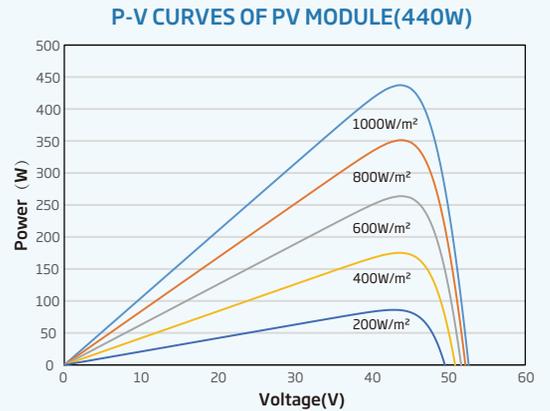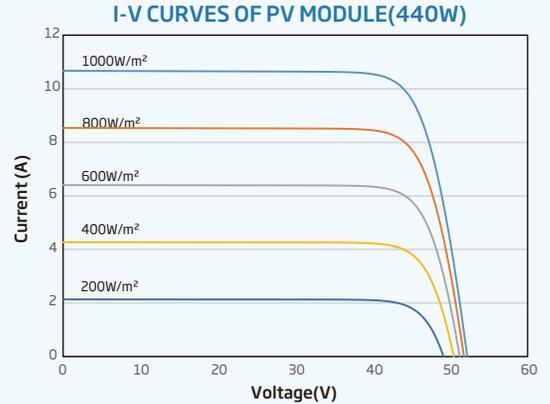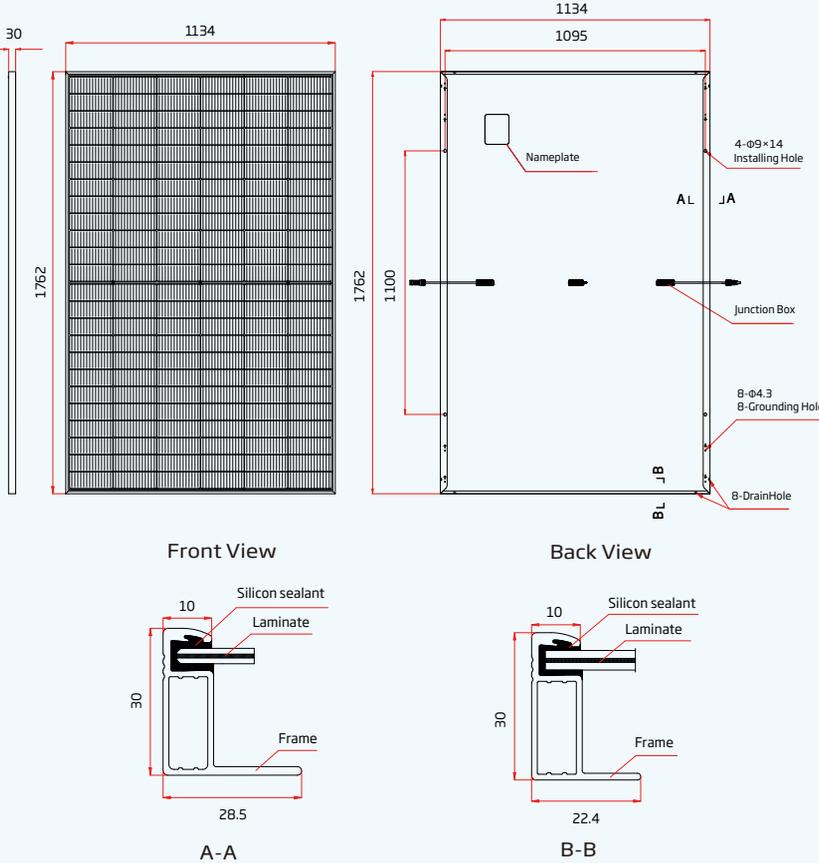

**ELECTRICAL DATA (STC) TSM-XXXNEG9R.25 (XXX=425-450)**

Peak Power Watts-P <sub>MAX</sub> (Wp)*	425	430	435	440	445	450
Binning Tolerance-P <sub>MAX</sub> (W)	0 ~ +5					
Maximum Power Voltage-V <sub>MPP</sub> (V)	42.9	43.2	43.6	44.0	44.3	44.6
Maximum Power Current-I <sub>MPP</sub> (A)	9.92	9.96	9.99	10.01	10.05	10.09
Open Circuit Voltage-V <sub>OC</sub> (V)	50.9	51.4	51.8	52.2	52.6	52.9
Short Circuit Current-I <sub>SC</sub> (A)	10.56	10.59	10.64	10.67	10.71	10.74
Module Efficiency η <sub>m</sub> (%)	21.3	21.5	21.8	22.0	22.3	22.5

STC: Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5. \*Measuring tolerance: ±3%.

**ELECTRICAL DATA (NOCT)**

Maximum Power-P <sub>MAX</sub> (Wp)	325	328	332	336	339	343
Maximum Power Voltage-V <sub>MPP</sub> (V)	40.1	40.5	40.8	41.1	41.4	41.7
Maximum Power Current-I <sub>MPP</sub> (A)	8.09	8.11	8.15	8.17	8.20	8.24
Open Circuit Voltage-V <sub>OC</sub> (V)	48.3	48.8	49.2	49.5	49.9	50.2
Short Circuit Current-I <sub>SC</sub> (A)	8.51	8.53	8.57	8.60	8.63	8.65

NOCT: Irradiance at 800W/m<sup>2</sup>, Ambient Temperature 20°C, Wind Speed 1m/s.

**MECHANICAL DATA**

Solar Cells	N-type Monocrystalline
No. of cells	144 cells
Module Dimensions	1762×1134×30 mm (69.06×43.15×1.18 inches)
Weight	21.0kg (46.30 lb)
Front Glass	1.6 mm (0.06 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	POE/EVA
Back Glass	1.6mm(0.06 inches), Heat Strengthened Glass
Frame	30mm (0.06 inches) Anodized Aluminium Alloy, Black
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm <sup>2</sup> (0.006 inches <sup>2</sup> ), Length: 1100mm/1100mm(43.3/43.3 inches)
Connector	Stabuli MC4 EVO2

**TEMPERATURE RATINGS**

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P <sub>MAX</sub>	-0.29%/°C
Temperature Coefficient of Voc	-0.24%/°C
Temperature Coefficient of Isc	0.04%/°C

**MAXIMUM RATINGS**

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
Max Series Fuse Rating	25A

**WARRANTY**

25 year Product Workmanship Warranty\*\*  
 30 year Power Warranty  
 1% first year degradation  
 0.4% Annual Power Attenuation

**PACKAGING CONFIGURATION**

Modules per box: 36 pieces  
 Modules per 40' container: 936 pieces

(\*\*Please refer to Limited Warranty Supplement that applies to the TSM-\*\*\*NEG9R.25, Products supplied and installed within Australia & New Zealand)